


# VALUE UTP Patch Cord, Cat.6 (Class E), yellow, 1 m

|                           |               |
|---------------------------|---------------|
| <b>Product No.</b>        | 21.99.1532    |
| <b>Manufacturer</b>       | VALUE         |
| <b>Manufacturer No.</b>   | 21.99.1532    |
| <b>EAN (single piece)</b> | 7611990177745 |

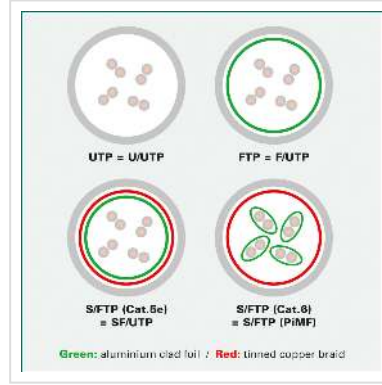

Patch cable for networking connections between devices. Prepared unshielded Twisted Pair cable with RJ-45 connectors on both ends. Durable due to moulded kink protection. Flexible cable, suitable for narrow bending. Plugs with gold plated contacts. Contact settings 1:1, in accordance with the EIA/TIA 568 standard. Construction: 4-pair stranded wire.

For a structured cabling system we recommend to use the following components: VALUE Cat.6 UTP Cable, Solid Wire, AWG24, 300 m: 21.99.0995. VALUE Cat.6 Flush/Surface Mount Wall Jack, unshielded, white: 25.99.8494/25.99.8394; VALUE Cat.6 19" Patch Panel, 24 Ports, unshielded: 26.99.0351 (black), 26.99.0352 (grey); VALUE Cat.6 UTP Patch Cord, grey, 5 m: 21.99.0905. Our in-house laboratory has tested this cable-plug combination, in a Channel of 100 meters, in compliance with Class E specifications.

## Technical specifications

|               |                    |
|---------------|--------------------|
| Manufacturer  | VALUE              |
| Product group | Twisted Pair Cable |
| Product type  | UTP Patch Cables   |
| Colour        | yellow             |
| Length        | 1 m                |
| Shield type   | UTP                |

|                  |                |
|------------------|----------------|
| Transfer quality | Cat6 / Class E |
|------------------|----------------|

|           |         |
|-----------|---------|
| Impedance | 100 Ohm |
|-----------|---------|

|                   |   |
|-------------------|---|
| Quantity of wires | 8 |
|-------------------|---|

|                |      |
|----------------|------|
| Conductor type | Wire |
|----------------|------|

|         |    |
|---------|----|
| Crossed | no |
|---------|----|

|               |    |
|---------------|----|
| Locking lever | no |
|---------------|----|

|                  |            |
|------------------|------------|
| Anti-kink sleeve | Moulded-on |
|------------------|------------|

|                |        |
|----------------|--------|
| Colour (Spout) | yellow |
|----------------|--------|

|            |    |
|------------|----|
| Cable LSOH | no |
|------------|----|

|                       |       |
|-----------------------|-------|
| Side 1 Connector Type | RJ-45 |
|-----------------------|-------|

|                         |      |
|-------------------------|------|
| Side 1 Connector Gender | Male |
|-------------------------|------|

|                       |       |
|-----------------------|-------|
| Side 2 Connector Type | RJ-45 |
|-----------------------|-------|

|                         |      |
|-------------------------|------|
| Side 2 Connector Gender | Male |
|-------------------------|------|

|                     |          |
|---------------------|----------|
| Connector Type RJ45 | Standard |
|---------------------|----------|

|        |        |
|--------|--------|
| Weight | 33.4 g |
|--------|--------|

|                                    |       |
|------------------------------------|-------|
| Height of packaging (single piece) | 20 mm |
|------------------------------------|-------|

|                                   |       |
|-----------------------------------|-------|
| Width of packaging (single piece) | 70 mm |
|-----------------------------------|-------|

|                                   |        |
|-----------------------------------|--------|
| Depth of packaging (single piece) | 120 mm |
|-----------------------------------|--------|

|                               |          |
|-------------------------------|----------|
| Package weight (single piece) | 0.034 kg |
|-------------------------------|----------|